ZOOMLION

TELESCOPIC BOOM LIFTS

ZT76J/ZT88J

Comply with ANSI/CSA Standard



HIGHLIGHTS

- Parallel four-link lifting mechanism for smooth boom movement
- Hexagonal boom design with good anti-fatigue performance and strong rigidity
- Smooth leveling and flexible chassis steering
- Load sensitive system, saving energy
- Upgraded telematics for high efficient service
- Deadweight lowering system for smooth operation and energy efficiency

FEATURES

Standard Features

Horn
Proportional control
Motion alarm
Flashing beacon
Self-closing entry gate
Emergency descent system
Emergency stop button
Auto-leveling system
On-board diagnostic system
Tilt protection system
Oscillating axle
Load sensing system
4.3' Led display
Swing-out engine tray


Accessories & Options


- Platform work light
- Anti-collision device
- AC power to platform

ACCESS WITH ZOOMLION GREEN


Phone: 0086(731)-88353680 0086(731)-88250971
E-mail: awp@zoomlion.com
Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
Web: www.zoomlion-access.com

Model	ZT76J	ZT88J
Size		
Work Height	82ft 4in	94ft 1in
Platform Height	75ft 9in	87ft 7in
Horizontal Outreach	59ft 4in	72ft 6in
A - Stowed Length	34ft 5in	39ft
B - Stowed Width	8ft	8ft 2in
C - Stowed Height	9ft	9ft 3in
D - Platform Length	8ft	8ft
E - Platform Width	3ft	3ft
F - Wheelbase	8ft 3in	9ft 2in
Tread	8ft	8ft 2in
G - Ground Clearance	1ft 3in	1ft 3in
Performance		
Platform Capacity (Unrestricted/Restricted)	660/1000lb	660/1000lb
Drive Speed (Stowed)	3.73mph	3.42mph
Gradeability	45% (24°)	45% (24°)
Turning Radius (Inside)	7ft 10in	11ft 5in
Turning Radius (Outside)	17ft 9in	20ft
Turntable Swing	360° continuous	360° continuous
Platform Rotation	±90°	±90°
Tail Swing	5ft 4in	5ft 8in
Jib (Range of Articulation)	130° (-55°~75°)	130° (-55°~75°)
Max. Wind Speed	28mph	28mph
Power		
Engine	KUBOTA V2403(EuropeV)	KUBOTA V2403(EuropeV)
Fuel Tank Capacity	39.6 (us gal)	39.6 (us gal)
Control Voltage	12V DC	12V DC
Hydraulic Tank Capacity	39.6 (us gal)	39.6 (us gal)
Drive Mode	4WD	4WD
Steering Mode	Front-wheel	Front-wheel
Tire		
Type	36×14-20 solid tire (standard) 355/55-24.5 foam-filled tire (option) 355/55D-625 foam-filled tire (option)	385/65-24 solid tire (standard) 15-625 foam-filled tire (option) 385/55-24.5 foam-filled tire (option)
Weight		
Gross	27557lb	38360lb



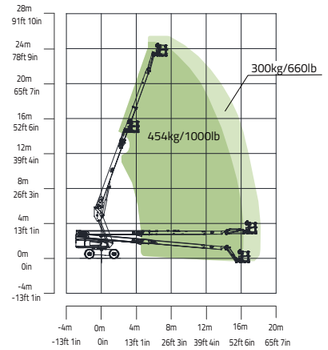

Range of Motion ZT76J



Range of Motion ZT88J

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification.
Product specifications are updated to July, 2025.